

ERMES

DUAL

**ONE GRINDER,
DUAL MODE,
ENDLESS POSSIBILITIES.**



SINGLE SHOT OR
ON DEMAND:
CRAFTED FOR
COFFEE MINDS.

SCHEDA TECNICA
TECHNICAL SHEET




ERMES

DUAL

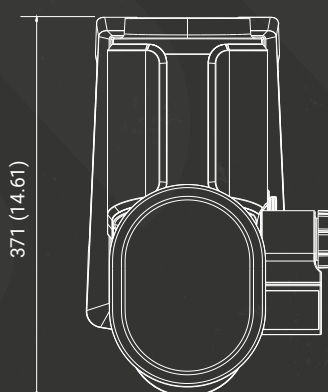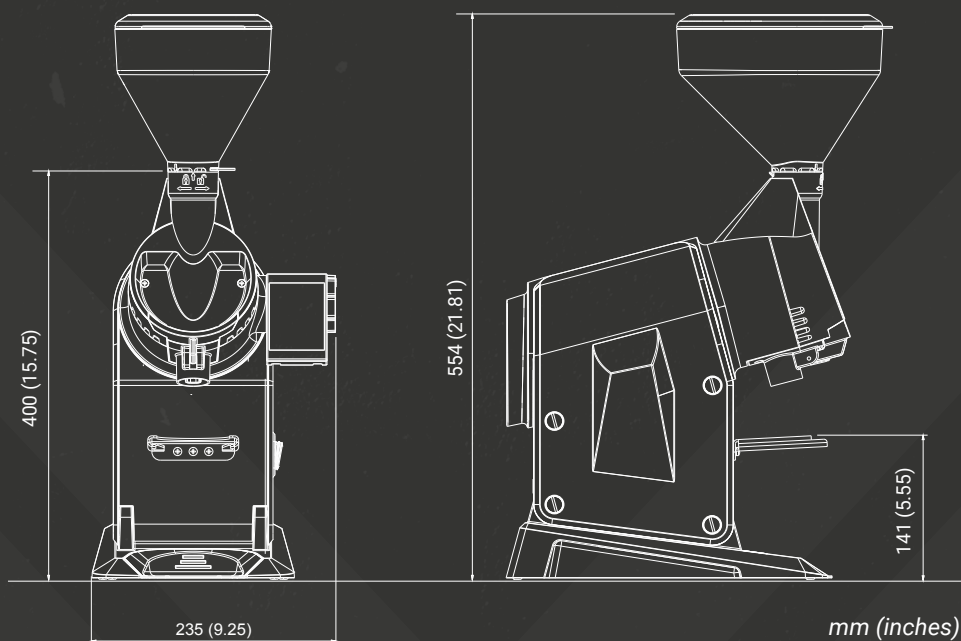

PESO NETTO NET WEIGHT	KG	12.4
	POUNDS	27.3

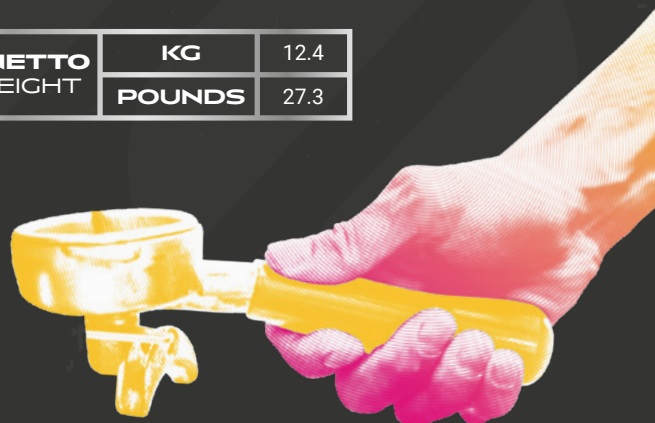

MACINADOSATORE GRINDER / DISPENSER	ALIMENTAZIONE ELETTRICA POWER SUPPLY	POTENZA INSTALLATA INSTALLED POWER	SERVIZIO MOTORE DUTY CYCLE	CORRENTE DI LINEA LINE POWER	SEZIONE CAVO ALIMENTAZIONE SUPPLY CABLE SECTION
ERMES DUAL	220 - 240 V 50 Hz 220 V 60 Hz	550 W / 650 W			min. 3 x 0,75 mm ²
	110 - 120 V 60 Hz		20 s ON / 80 s OFF	7.0 A	min. 3 x 16 AWG
	100 V 50-60 Hz	800 W			min. 3G 1.25 mm ²
	220 V 60 Hz	650 W			3 x 1,5 mm ²

INTERRUTTORE	- Omnipolare con distanza di apertura contatti 3 mm - Protezione da corrente di dispersione con valore pari a 30 mA	SWITCH	- Omnipolar, 3 mm opening contact distance - Protection from leakage current with a value equal to 30 mA
MESSA A TERRA	Obbligatoria	GROUNDING	Required

DISCOVER MORE AT WWW.CASADIO.COM



CASADIO